

B03 Metallized Polyester Film Capacitor-Miniature Size


FEATURES

- Metallized polyester film, epoxy resin coating.
- Small size, light weight
- Large C-Values in small dimensions
- Excellent self-healing property and high reliability

RATING AND CHARACTERISTIC

- Climatic category : 55 / 085 / 21
- Rated temperature : + 85
- Capacitance tolerances : ±5% ; ±10% ; ±20%
- Rated voltage dc 50/63v, 100v, 160v, 250v, 400v
- Capacitance range 0.001 to 10mfd
- Voltage : 1.4UR (1s)
- Insulation resistance : CR≤0.33μF : ≥3750MΩ UR≤100V
 CR > 0.33μF : ≥1250MΩ·μF UR≤100V
 CR≤0.33μF : ≥7500MΩ UR > 100V
 CR > 0.33μF : ≥2500MΩ·μF UR > 100V
- Dissipation : 0.01(1kHz)

ROHS

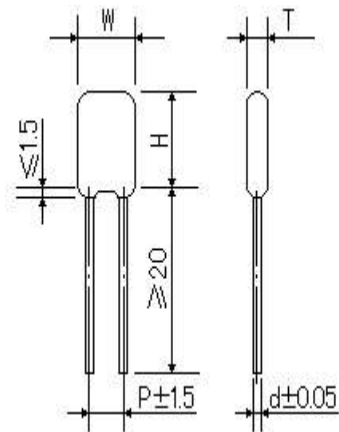

Capacitance μF	Rated Voltage (V)	Max Size(mm)				
		W	H	T	P	d
0.1	50/63V/ 100V	7.5	7	4.5	5.5	0.6
0.15		7.5	8.5	4.5	5.5	0.6
0.22		10	10	5	7	0.6
0.33		10	11	6	7	0.6
0.47		13.5	10	5.5	10.5	0.6
0.68		13.5	10.5	6	10.5	0.6
1		13.5	12	6.5	10.5	0.6

* The spec is subject to change without notice. Please contact us if any further queries.