

B04 Metallized polyester film capacitor for AC use


ROHS

FEATURES

- Metallized polyester film, flame-retardant epoxy resin coating.
- Excellent self-healing property
- Withstanding overvoltage stressing
- Excellent flame-retardant property

RATING AND CHARACTERISTIC

- Climatic category : 40 / 085 / 21
- Rated temperature : + 85
- Capacitance tolerances : $\pm 5\%$; $\pm 10\%$; $\pm 20\%$
- Capacitance range 0.01 to + 4.7 mfd
- Rated voltage: AC 250v
- Voltage : 4.3UR (2s)
- Insulation resistance : CR $\leq 0.33\mu\text{F}$: $\geq 15000\text{M}\Omega$
CR $> 0.33\mu\text{F}$: $\geq 5000\text{M}\Omega \cdot \mu\text{F}$
- Dissipation : ≤ 0.01 (1kHz)

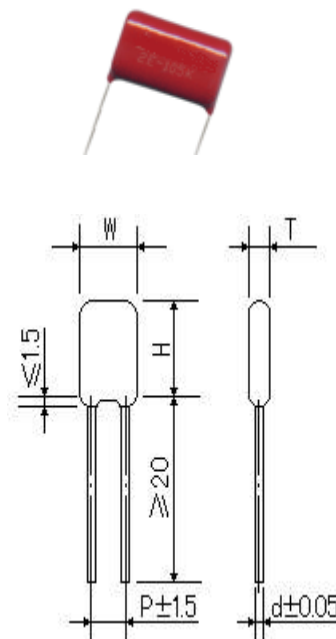

| Capacitance μF | Rated Voltage (V) | Max Size(mm) | | | | |
|------------------------------|-------------------------|--------------|------|------|----|-----|
| | | W | H | T | P | d |
| 0.047 | 250 | 22 | 14 | 7 | 11 | 0.6 |
| 0.1 | | 27 | 14 | 9 | 16 | 0.8 |
| 0.15 | | 27 | 17 | 9.5 | 16 | 0.8 |
| 0.22 | | 27 | 18.5 | 11.5 | 21 | 0.8 |
| 0.33 | | 31 | 19 | 12 | 21 | 0.8 |
| 0.47 | | 31 | 21 | 14 | 26 | 0.8 |

* The spec is subject to change without notice. Please contact us if any further queries.