

B11 Metallized polypropylene film capacitor- High-voltage

FEATURES


Polypropylene film/metallized polypropylene film/metal foil,inside-series connection construction,
 flame-retardant epoxy resin coating
 High reliability,large-current loading and excellent high-frequency properties
 Very low dissipation factor,small inherent temperature rise
 High insulation resistance

ROHS



RATING AND CHARACTERISTIC

Climatic category : 40 / 085 / 21
 Rated temperature : + 85
 Capacitance tolerances : $\pm 5\%$; $\pm 10\%$
 Rated voltage Dc 1000v, 1250v, 1500, 1600v and 2000v
 Capacitance range 0.001 to 0.15mfd
 Voltage : 2UR (2s)
 Insulation resistance : $\geq 25000M\Omega$
 Dissipation : $\leq 0.001(1kHz)$

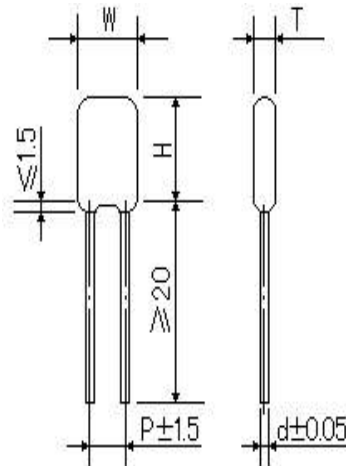

Capacitance μF	Rated Voltage (V)	Max Size(mm)				
		W	H	T	P	D
0.001	1600	23	14	8	18	0.8
0.0015		23	15	9	18	0.8
0.0016		23	16	9.5	18	0.8
0.0018		23	17	9.5	18	0.8
0.002		23	17	9.5	18	0.8
0.0022		23	17.5	10	18	0.8
0.0024		23	17.5	10	18	0.8
0.0027		23	18	10	18	0.8
0.003		23	18.5	10.5	18	0.8
0.0033		23	19	11	18	0.8
0.0036		29	16.5	10	25	0.8
0.0039		29	16.5	10	25	0.8
0.0043		29	17	10	25	0.8
0.0047		29	17	10	25	0.8
0.0051		29	17.5	10	25	0.8
0.0056		29	17.5	10	25	0.8
0.0062		29	18	10	25	0.8
0.0068		29.5	19	10.5	25	0.8
0.0075		29.5	20	10.5	25	0.8
0.0082		29.5	20.5	11.5	25	0.8
0.0091	31.5	20.5	11	27	0.8	
0.01	31.5	20.5	11.5	27	0.8	

* The spec is subject to change without notice. Please contact us if any further queries.